


ALL OUR PERFORMANCE CAPACITY AT A GLANCE.


Using this flow rate diagram, you can identify at a glance the coupling series suited to your application and the corresponding operating pressure.

- Flow KL (l/min.) – leak-free coupling systems
- Flow KB (l/min.) – double shut-off coupling systems
- Flow KA (l/min.) – single shut-off coupling systems
- Flow KF (l/min.) – straight-through coupling systems

The details refer to the air flow rate in litres/minute.*

* (Measurement data generated in accordance with ISO 6358; CCTOP RP50P at input pressure 6 bar, pressure drop 0.5 bar)

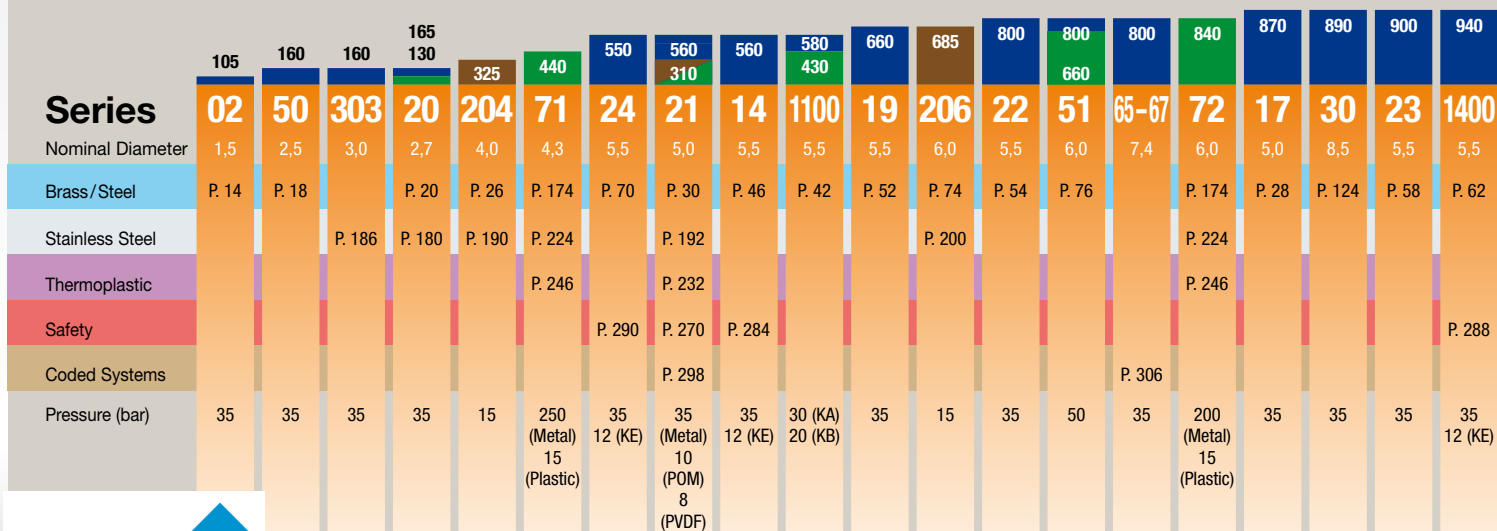

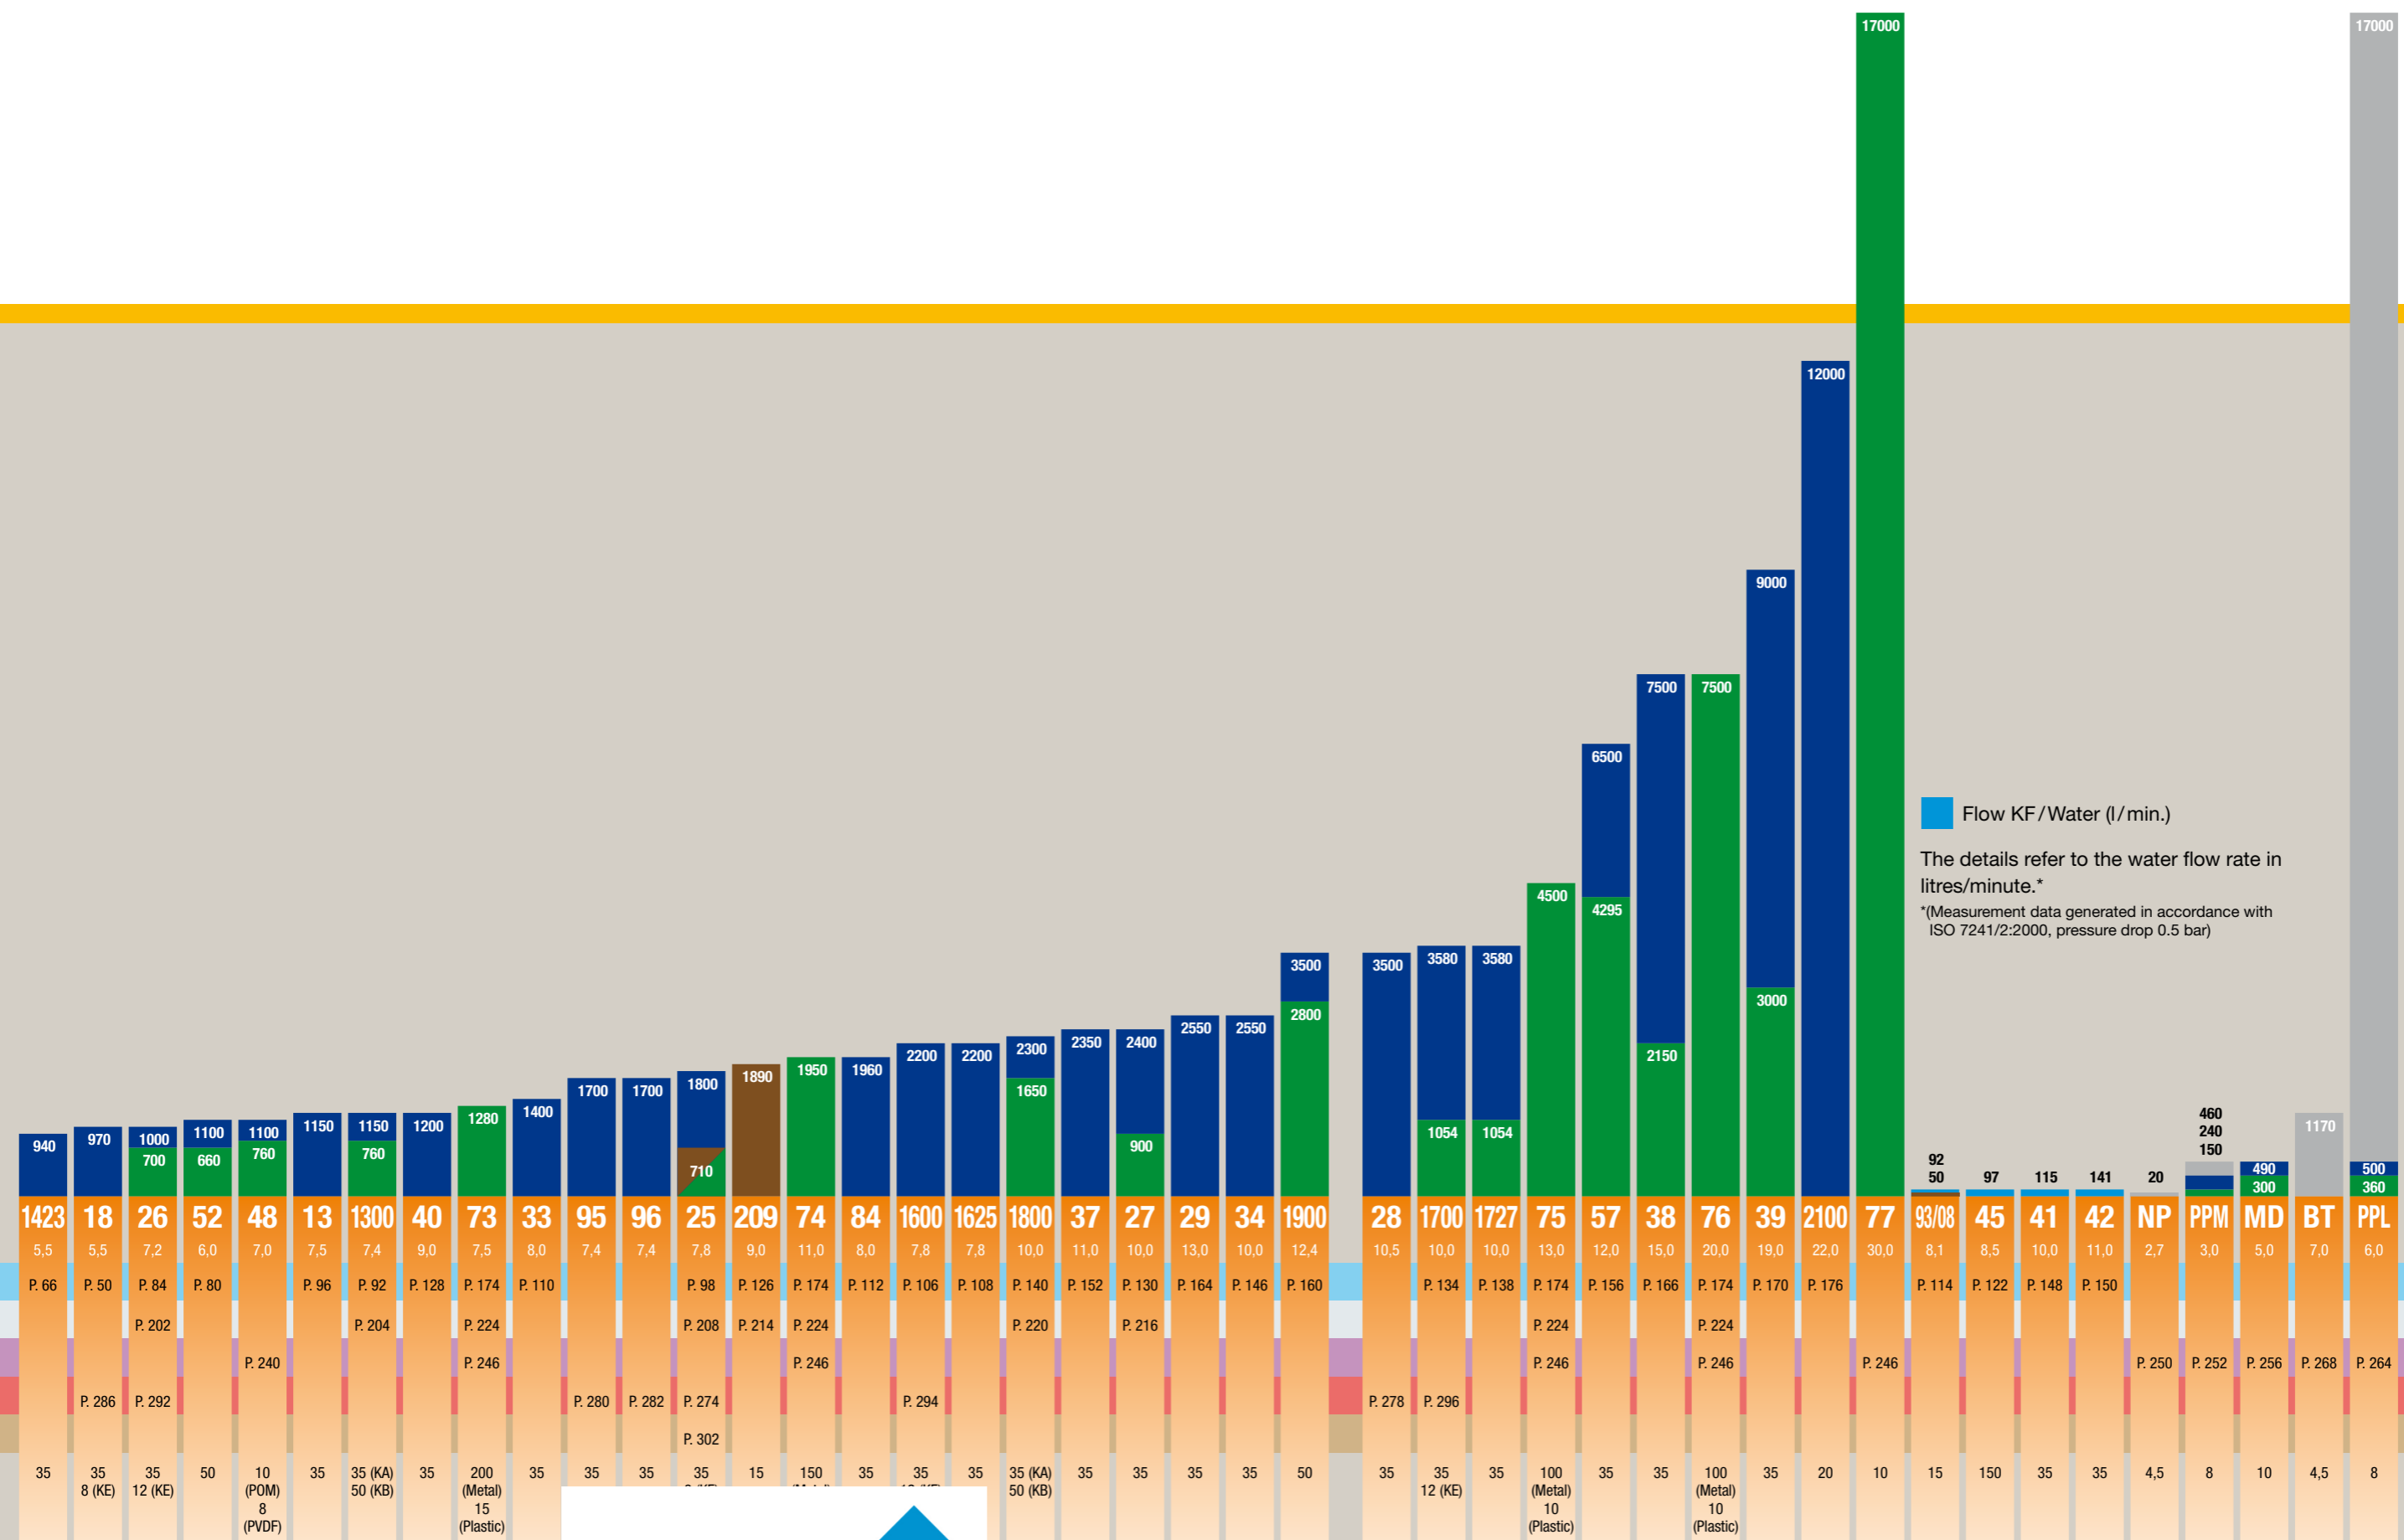

Flow KF/Water (l/min.)

The details refer to the water flow rate in litres/minute.*

*(Measurement data generated in accordance with ISO 7241/2:2000, pressure drop 0.5 bar)



Series	Nominal Diameter	Pressure (bar)
Brass/Steel		
Stainless Steel		
Thermoplastic		
Safety		
Coded Systems		